

Rail Trailers RT3230/RT3235

Track Transportation Equipment



Pandrol's Rail Trailers RT3230 and RT3235 are designed to transport materials and equipment between railway work sites.

Suitable for towing by a railroad vehicle, with a tow bar and a parking/emergency brake, Pandrol's Rail Trailers provide a safe method of moving goods between work locations.

→ TECHNICAL FEATURES

Safety features

Pandrol's Rail Trailers are equipped with lights and a parking/emergency brake to increase operator safety.

Durable tow bar

A durable tow bar is fitted as standard.

Removable panels

The Rail Trailers have removable panels that allow for easier loading and unloading.

Lifting features

Safer lifting is enabled by integrated lifting ears in each corner and rectangular pipes underneath the Rail Trailers' flatbed.

Stakes


Stakes for holding cargo are included with the RT3230 model.

Lightweight version

The Rail Trailer RT3235 has been engineered as a lighter weight alternative to the RT3230..

→ ADVANTAGES /

- Pandrol's Rail Trailers are strong, robust and durable, making them a cost-effective, long-lasting solution.
- They come in two sizes, with high loading capacities to cover most requirements.
- Lights and a parking/emergency brake increase operator safety on site.
- Removable side panels allow for ease of loading and unloading.
- The Rail Trailers streamline strenuous track maintenance and transportation tasks.

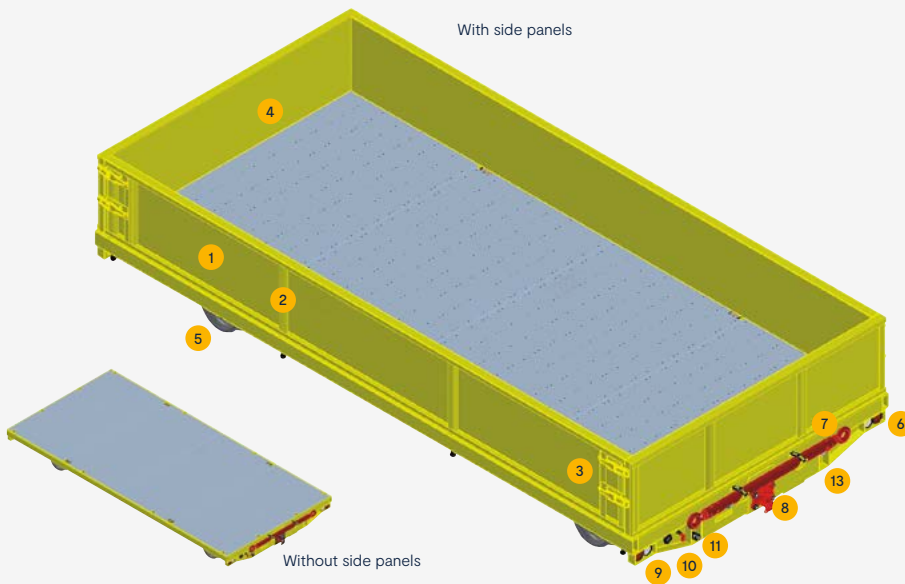

→ COMPONENTS /

- | | |
|---------------------------------|----------------------|
| 1. Side panels | 7. Towing bar |
| 2. Stakes | 8. Towing attachment |
| 3. Side panel lock | 9. Volt meter |
| 4. Front/rear panel | 10. Main switch |
| 5. Rail wheels (w brakes) | 11. Servo pressure |
| 6. Direction lights (white/red) | 12. Lights switch |
| | 13. Battery charging |

→ SPECIFICATIONS /

Technical data				
Description	RT3230 with side panels	RT3230 without side panels	RT3235 with side panels	RT3235 without side panels
Item number	5010520	5010525	32350001S	32350002S
Weight	2685kg	2295kg	820kg	700kg
Length	5500mm	5500mm	2500mm	2500mm
Width	2560mm	2560mm	1800mm	1800mm
Loading height	5500mm	5500mm	2500mm	2500mm
Gauge	1435mm	1435mm	1435mm	1435mm
Loading capacity	17000kg	17000kg	3500kg	3500kg

→ LEARN MORE

